

REDGUM BRAND
Daily Living and Lifestyle Products *Height Adjustable Walker Assembly*

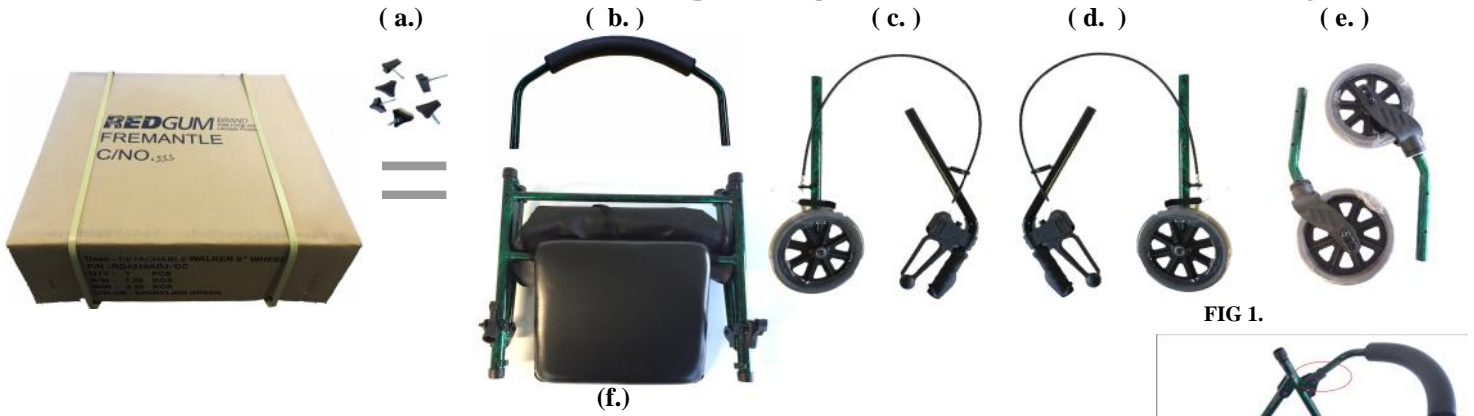


FIG 1.

- Box Contents** = 6 x Turn Knobs (all the same size) (a.)
 1 x Backrest (b.)
 1 x Main Seat Walker Assembly (f.)
 1 x Right Brake & Rear Wheel Assembly (c.)
 1 x Left Brake & Rear Wheel Assembly (d.)
 2 x Front Wheel assembly (interchangeable) (e.)

Assembly Steps:

1. Unpack and remove plastic from components.
2. Click brass buttons on backrest into sockets on Front of Main Walker assembly. **Fig 1**
3. Click Rear Wheel Right shaft with Brass button (c.) into RHS Walker Assembly tube. Two height adjustment positions are available. **Lock in place with turn Knob.** To ensure you are correct the rear wheel faces outwards when assembled. **Fig 2**
4. Slide Right handle assembly shaft with predrilled holes into upper tube of main frame with handles facing back. Align holes to the desired height **and lock in place with turn Knob.** 8 Height adjustments are available. **Fig 3**
5. Repeat process for Left Rear Wheel and Handle assembly into main seat walker assembly on left hand side.
6. Click Front legs (e.) into front main walker assembly frame tubes. **Fig 4** **Lock in place with turn Knob.** Two height adjustments are available.
7. Clip the brake cable guides to the frame below the backrest on the front frame. **Fig 5**



FIG 2.



FIG 3.



FIG 4.



FIG 5.

PRIOR TO USE: ENSURE ALL WHEELS ARE SET TO THE SAME HEIGHT AND THAT ALL 6 TURN KNOBS ARE TIGHT.

